




Pulegge a gola PL per bussola conica **POGGILOCK®**

PL V-belt pulleys for taperbushes **POGGILOCK®**

PL Keilriemenscheiben für Spannbuchse **POGGILOCK®**

Poulies trapézoïdales PL pour moyeu amovible **POGGILOCK®**

Poleas trapeciales PL para casquillo cónico **POGGILOCK®**

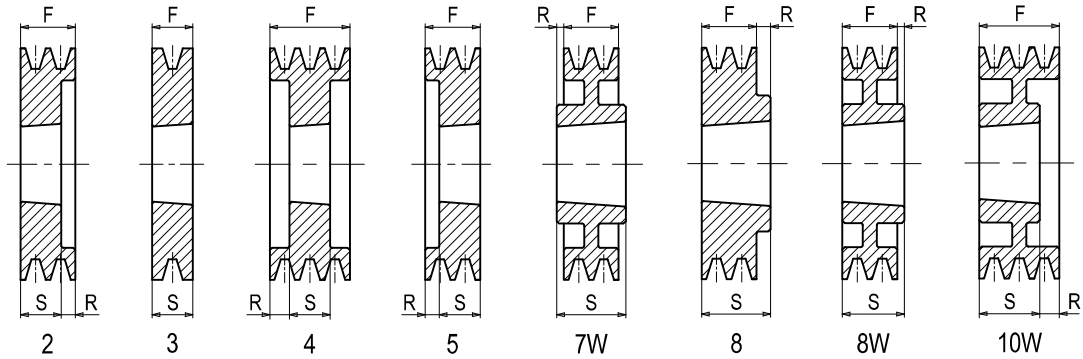

B - SPB - 5V

Materiale Material Werkstoff Matériel Material	Codice Item number Codierung Code Código	Descrizione Designation Bezeichnung Désignation Referencia	Dp mm	N° Gole Grooves Rillen Gorges Canales	Bussola Bush Buchse Moyeu Casquillo	Foro Bore Bohrung Alésage Agujero max mm	F mm	R mm	S mm	Peso Weight Gewicht Poids Peso kg
Ghisa Cast iron - Grauguß - Fonte - Fundición	20B017003	PL 3 SPB 170 -type 2	170	3	2517	65	63,0	18,0	45	5,60
	20B017004	PL 4 SPB 170 -type 4	170	4	2517	65	82,0	18,5	45	6,40
	20B017005	PL 5 SPB 170 -type 4	170	5	3020	75	101,0	25,0	51	6,50
	20B017006	PL 6 SPB 170 -type 4	170	6	3020	75	120,0	34,5	51	7,40
	20B017008	PL 8 SPB 170 -type 4	170	8	3030	75	158,0	41,0	76	10,60
	20B018001	PL 1 SPB 180 -type 10W	180	1	1610	42	25,0	-	25	2,70
	20B018002	PL 2 SPB 180 -type 8	180	2	2517	65	44,0	1,0	45	5,40
	20B018003	PL 3 SPB 180 -type 2	180	3	2517	65	63,0	18,0	45	6,40
	20B018004	PL 4 SPB 180 -type 4	180	4	2517	65	82,0	18,5	45	7,60
	20B018005	PL 5 SPB 180 -type 4	180	5	3020	75	101,0	25,0	51	8,00
	20B018006	PL 6 SPB 180 -type 4	180	6	3020	75	120,0	34,5	51	9,20
	20B018008	PL 8 SPB 180 -type 4	180	8	3030	75	158,0	41,0	76	11,90
	20B019001	PL 1 SPB 190 -type 7W	190	1	2012	50	25,0	3,5	32	3,10
	20B019002	PL 2 SPB 190 -type 8	190	2	2517	65	44,0	1,0	45	5,60
	20B019003	PL 3 SPB 190 -type 2	190	3	2517	65	63,0	18,0	45	7,30
	20B019004	PL 4 SPB 190 -type 4	190	4	2517	65	82,0	18,5	45	8,50
	20B019005	PL 5 SPB 190 -type 4	190	5	3020	75	101,0	25,0	51	8,60
	20B019006	PL 6 SPB 190 -type 4	190	6	3020	75	120,0	34,5	51	10,00
	20B019008	PL 8 SPB 190 -type 4	190	8	3030	75	158,0	41,0	76	13,40
	20B020001	PL 1 SPB 200 -type 7W	200	1	2012	50	25,0	3,5	32	3,20
	20B020002	PL 2 SPB 200 -type 8	200	2	2517	65	44,0	1,0	45	5,40
	20B020003	PL 3 SPB 200 -type 2	200	3	2517	65	63,0	18,0	45	6,20
	20B020004	PL 4 SPB 200 -type 4	200	4	3020	75	82,0	15,5	51	9,20
	20B020005	PL 5 SPB 200 -type 4	200	5	3020	75	101,0	25,0	51	10,40
	20B020006	PL 6 SPB 200 -type 4	200	6	3020	75	120,0	34,5	51	12,00
	20B020008	PL 8 SPB 200 -type 4	200	8	3535	90	158,0	34,5	89	14,60
	20B021201	PL 1 SPB 212 -type 7W	212	1	2012	50	25,0	3,5	32	4,00
	20B021202	PL 2 SPB 212 -type 8W	212	2	2517	65	44,0	1,0	45	5,80
	20B021203	PL 3 SPB 212 -type 10W	212	3	2517	65	63,0	18,0	45	6,90
	20B021204	PL 4 SPB 212 -type 4	212	4	3020	75	82,0	15,5	51	10,80
	20B021205	PL 5 SPB 212 -type 4	212	5	3020	75	101,0	25,0	51	11,80
	20B021206	PL 6 SPB 212 -type 4	212	6	3535	90	120,0	15,5	89	15,00
	20B021208	PL 8 SPB 212 -type 4	212	8	3535	90	158,0	34,5	89	17,50
	20B022401	PL 1 SPB 224 -type 7W	224	1	2012	50	25,0	3,5	32	4,20
	20B022402	PL 2 SPB 224 -type 8W	224	2	2517	65	44,0	1,0	45	6,80
	20B022403	PL 3 SPB 224 -type 10W	224	3	2517	65	63,0	18,0	45	7,70
	20B022404	PL 4 SPB 224 -type 4	224	4	3020	75	82,0	15,5	51	12,20
	20B022405	PL 5 SPB 224 -type 4	224	5	3020	75	101,0	25,0	51	14,00
	20B022406	PL 6 SPB 224 -type 4	224	6	3535	90	120,0	15,5	89	17,60
	20B022408	PL 8 SPB 224 -type 4	224	8	3535	90	158,0	34,5	89	20,00
	20B023601	PL 1 SPB 236 -type 7W	236	1	2012	50	25,0	3,5	32	4,40
	20B023602	PL 2 SPB 236 -type 8W	236	2	2517	65	44,0	1,0	45	6,90
	20B023603	PL 3 SPB 236 -type 10W	236	3	2517	65	63,0	18,0	45	8,40
	20B023604	PL 4 SPB 236 -type 4	236	4	3020	75	82,0	15,5	51	14,00
	20B023605	PL 5 SPB 236 -type 4	236	5	3535	90	101,0	6,0	89	19,00
	20B023606	PL 6 SPB 236 -type 4	236	6	3535	90	120,0	15,5	89	20,00
	20B023608	PL 8 SPB 236 -type 4	236	8	3535	90	158,0	34,5	89	23,20