


**FAG****31324-X-DF-A140-180**

Tapered roller bearing set

Tapered roller bearing set 313...-X-DF, X-arrangement

Materiálové číslo Schaeffler:
0896522584081

Technické informace

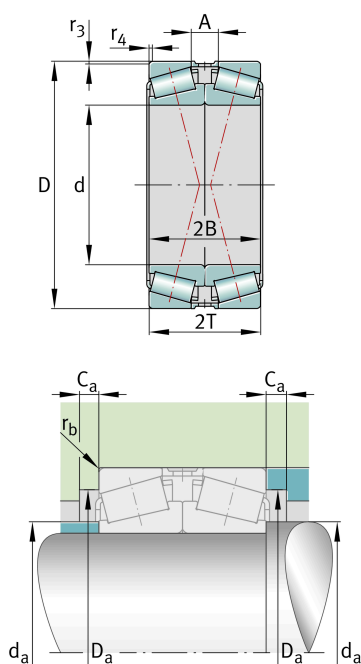

Vaše aktuální varianta produktu

Tolerance class	PN	Normal (ISO 492:2014)
Heat treatment	Standard	
Cage	Standard	Sheet steel cage, window cage, roller-guided
Axial internal clearance	A140-180	Axial internal clearance between 140 and 180 µm
Quality level	Standard	
Matched arrangement	F	X arrangement
Number of rolling element rows	2	Double-row design

Main Dimensions & Performance Data

d	120 mm	Bore diameter
D	260 mm	Outside diameter
2B	124 mm	Inner ring total width
2T	136 mm	Outer ring total width
C _r	930.000 N	Basic dynamic load rating, radial
C _{0r}	1.400.000 N	Basic static load rating, radial
C _{ur}	168.000 N	Fatigue load limit, radial
n _G	2.600 1/min	Limiting speed
n _{gr}	1.690 1/min	Thermal speed rating
≈m	32,7 kg	Hmotnost



Mounting dimensions

$d_{a\max}$	145 mm	Maximum diameter of shaft shoulder
$D_{a\min}$	203 mm	Minimum diameter of housing shoulder
$D_{a\max}$	246 mm	Maximum diameter of housing shoulder
$C_{a\min}$	9 mm	Minimum axial space
$r_{b\max}$	3 mm	Maximum fillet radius of housing

Dimensions

$r_{3,4\min}$	3 mm	Minimum chamfer dimension of outer ring back face
A	52 mm	Width of spacer

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	200 °C	Operating temperature max.

Calculation factors

e	0,83	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	0,82	Dynamic axial load factor
Y_2	1,22	Dynamic axial load factor
Y_0	0,8	Static axial load factor

Vlastnosti

	Radiální zatížení
	Axiální zatížení v jednom směru
	Axiální zatížení ve dvou směrech
	Mazání (plastickým mazivem)
	Mazání olejem
	Neutěsněné