




Pulegge a gola PL per bussola conica **POGGILOCK®**

PL V-belt pulleys for taperbushes **POGGILOCK®**

PL Keilriemenscheiben für Spannbuchse **POGGILOCK®**

Poulies trapézoïdales PL pour moyeu amovible **POGGILOCK®**

Poleas trapeciales PL para casquillo cónico **POGGILOCK®**

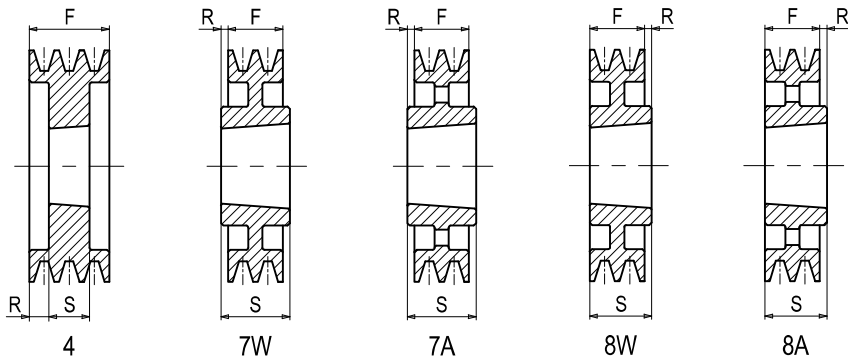

B - SPB - 5V

Materiale Material Werkstoff Matériel Material	Codice Item number Codierung Code Código	Descrizione Designation Bezeichnung Désignation Referencia	Dp mm	N° Gole Grooves Rillen Gorges Canales	Bussola Bush Buchse Moyeu Casquillo	Foro Bore Bohrung Alésage Agujero max mm	F mm	R mm	S mm	Peso Weight Gewicht Poids Peso kg
Ghisa Cast iron - Grauguß - Fonte - Fundición	20B025001	PL 1 SPB 250 -type 7W	250	1	2012	50	25,0	3,5	32	4,60
	20B025002	PL 2 SPB 250 -type 8W	250	2	2517	65	44,0	1,0	45	7,10
	20B025003	PL 3 SPB 250 -type 10W	250	3	3020	75	63,0	12,0	51	9,80
	20B025004	PL 4 SPB 250 -type 9W	250	4	3020	75	82,0	15,5	51	11,50
	20B025005	PL 5 SPB 250 -type 4	250	5	3535	90	101,0	6,0	89	22,00
	20B025006	PL 6 SPB 250 -type 4	250	6	3535	90	120,0	15,5	89	23,80
	20B025008	PL 8 SPB 250 -type 4	250	8	3535	90	158,0	34,5	89	26,70
	20B028001	PL 1 SPB 280 -type 7W	280	1	2012	50	25,0	3,5	32	5,20
	20B028002	PL 2 SPB 280 -type 8W	280	2	2517	65	44,0	1,0	45	8,40
	20B028003	PL 3 SPB 280 -type 9W	280	3	3020	75	63,0	6,0	51	10,90
	20B028004	PL 4 SPB 280 -type 9W	280	4	3020	75	82,0	15,5	51	13,40
	20B028005	PL 5 SPB 280 -type 9W	280	5	3535	90	101,0	6,0	89	18,60
	20B028006	PL 6 SPB 280 -type 9W	280	6	3535	90	120,0	15,5	89	20,60
	20B028008	PL 8 SPB 280 -type 9W	280	8	3535	90	158,0	34,5	89	28,00
	20B030001	PL 1 SPB 300 -type 7W	300	1	2012	50	25,0	3,5	32	5,60
	20B030002	PL 2 SPB 300 -type 8W	300	2	2517	65	44,0	1,0	45	9,20
	20B030003	PL 3 SPB 300 -type 9W	300	3	3020	75	63,0	6,0	51	12,20
	20B030004	PL 4 SPB 300 -type 8W	300	4	3535	90	82,0	7,0	89	21,00
	20B030005	PL 5 SPB 300 -type 9W	300	5	3535	90	101,0	6,0	89	19,00
	20B030006	PL 6 SPB 300 -type 9W	300	6	3535	90	120,0	15,5	89	21,00
	20B030008	PL 8 SPB 300 -type 9W	300	8	3535	90	158,0	34,5	89	28,70
	20B031501	PL 1 SPB 315 -type 7W	315	1	2012	50	25,0	3,5	32	5,90
	20B031502	PL 2 SPB 315 -type 8W	315	2	2517	65	44,0	1,0	45	9,50
	20B031503	PL 3 SPB 315 -type 9W	315	3	3020	75	63,0	6,0	51	13,40
	20B031504	PL 4 SPB 315 -type 7W	315	4	3535	90	82,0	3,5	89	19,00
	20B031505	PL 5 SPB 315 -type 9W	315	5	3535	90	101,0	6,0	89	20,50
	20B031506	PL 6 SPB 315 -type 9W	315	6	3535	90	120,0	15,5	89	23,60
	20B031508	PL 8 SPB 315 -type 9W	315	8	3535	90	158,0	34,5	89	32,00
	20B033502	PL 2 SPB 335 -type 8W	335	2	2517	65	44,0	1,0	45	9,60
	20B033503	PL 3 SPB 335 -type 9W	335	3	3020	75	63,0	6,0	51	14,00
	20B033504	PL 4 SPB 335 -type 7W	335	4	3535	90	82,0	3,5	89	21,40
	20B033505	PL 5 SPB 335 -type 9W	335	5	3535	90	101,0	6,0	89	22,80
	20B033506	PL 6 SPB 335 -type 9W	335	6	3535	90	120,0	15,5	89	25,60
	20B033508	PL 8 SPB 335 -type 9W	335	8	3535	90	158,0	34,5	89	33,00
	20B035502	PL 2 SPB 355 -type 7A	355	2	3020	75	44,0	3,5	51	12,40
	20B035503	PL 3 SPB 355 -type 9W	355	3	3020	75	63,0	6,0	51	14,20
	20B035504	PL 4 SPB 355 -type 7W	355	4	3535	90	82,0	3,5	89	22,50
	20B035505	PL 5 SPB 355 -type 9W	355	5	3535	90	101,0	6,0	89	24,00
	20B035506	PL 6 SPB 355 -type 9W	355	6	3535	90	120,0	15,5	89	28,00
	20B035508	PL 8 SPB 355 -type 9W	355	8	3535	90	158,0	34,5	89	34,00
	20B040002	PL 2 SPB 400 -type 7A	400	2	3020	75	44,0	3,5	51	14,50
	20B040003	PL 3 SPB 400 -type 7A	400	3	3535	90	63,0	13,0	89	18,80
	20B040004	PL 4 SPB 400 -type 7A	400	4	3535	90	82,0	3,5	89	24,00
	20B040005	PL 5 SPB 400 -type 9A	400	5	3535	90	101,0	6,0	89	27,50
	20B040006	PL 6 SPB 400 -type 9A	400	6	3535	90	120,0	15,5	89	29,50
	20B040008	PL 8 SPB 400 -type 9W	400	8	4040	100	158,0	28,0	102	42,20




Pulegge a gola PL per bussola conica **POGGILOCK®**

PL V-belt pulleys for taperbushes **POGGILOCK®**

PL Keilriemenscheiben für Spannbuchse **POGGILOCK®**

Poulies trapézoïdales PL pour moyeu amovible **POGGILOCK®**

Poleas trapeciales PL para casquillo cónico **POGGILOCK®**

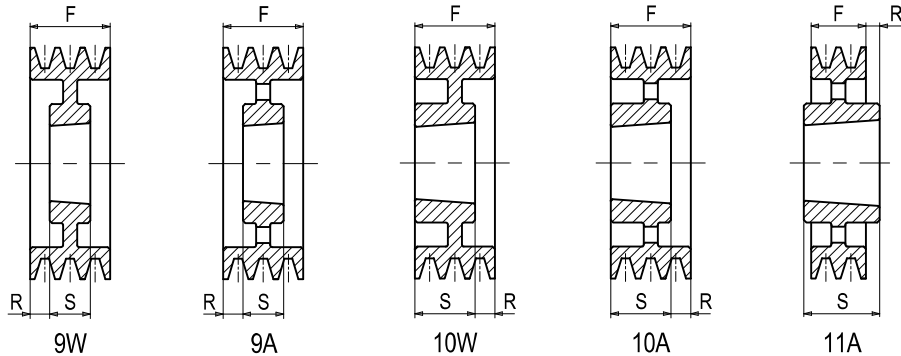

B - SPB - 5V

Materiale Material Werkstoff Matériel Material	Codice Item number Codierung Code Código	Descrizione Designation Bezeichnung Désignation Referencia	Dp mm	N° Gole Grooves Rillen Gorges Canales	Bussola Bush Buchse Moyeu Casquillo	Foro Bore Bohrung Alésage Agujero max mm	F mm	R mm	S mm	Peso Weight Gewicht Poids Peso kg
Ghisa Cast iron - Grauguß - Fonte - Fundición	20B045002	PL 2 SPB 450 -type 7A	450	2	3020	75	44,0	3,5	51	17,40
	20B045003	PL 3 SPB 450 -type 8A	450	3	3535	90	63,0	26,0	89	25,20
	20B045004	PL 4 SPB 450 -type 8A	450	4	3535	90	82,0	7,0	89	28,00
	20B045005	PL 5 SPB 450 -type 10A	450	5	3535	90	101,0	12,0	89	31,00
	20B045006	PL 6 SPB 450 -type 10A	450	6	4040	100	120,0	18,0	102	41,40
	20B045008	PL 8 SPB 450 -type 9A	450	8	4040	100	158,0	28,0	102	48,20
	20B050002	PL 2 SPB 500 -type 7A	500	2	3020	75	44,0	3,5	51	18,60
	20B050003	PL 3 SPB 500 -type 8A	500	3	3535	90	63,0	26,0	89	26,40
	20B050004	PL 4 SPB 500 -type 8A	500	4	3535	90	82,0	7,0	89	29,40
	20B050005	PL 5 SPB 500 -type 10A	500	5	3535	90	101,0	12,0	89	37,00
	20B050006	PL 6 SPB 500 -type 10A	500	6	4040	100	120,0	18,0	102	43,00
	20B050008	PL 8 SPB 500 -type 9A	500	8	4040	100	158,0	28,0	102	52,60
	20B056002	PL 2 SPB 560 -type 11A	560	2	3030	75	44,0	28,0	76	21,20
	20B056003	PL 3 SPB 560 -type 8A	560	3	3535	90	63,0	26,0	89	28,40
	20B056004	PL 4 SPB 560 -type 8A	560	4	3535	90	82,0	7,0	89	37,40
	20B056005	PL 5 SPB 560 -type 8A	560	5	4040	100	101,0	1,0	102	46,00
	20B056006	PL 6 SPB 560 -type 10A	560	6	4040	100	120,0	18,0	102	49,30
	20B056008	PL 8 SPB 560 -type 9A	560	8	4545	100	158,0	22,0	114	61,80
	20B063002	PL 2 SPB 630 -type 8A	630	2	3030	75	44,0	32,0	76	24,00
	20B063003	PL 3 SPB 630 -type 8A	630	3	3535	90	63,0	26,0	89	37,00
	20B063004	PL 4 SPB 630 -type 8A	630	4	3535	90	82,0	7,0	89	42,00
	20B063005	PL 5 SPB 630 -type 8A	630	5	4040	100	101,0	1,0	102	52,00
	20B063006	PL 6 SPB 630 -type 10A	630	6	4040	100	120,0	18,0	102	59,00
	20B063008	PL 8 SPB 630 -type 9A	630	8	4545	100	158,0	22,0	114	69,30
	20B071003	PL 3 SPB 710 -type 11A	710	3	3535	90	63,0	22,0	89	42,00
	20B071004	PL 4 SPB 710 -type 7A	710	4	3535	90	82,0	3,5	89	48,00
	20B071005	PL 5 SPB 710 -type 7A	710	5	4040	100	101,0	0,5	102	60,00
	20B071006	PL 6 SPB 710 -type 9A	710	6	4040	100	120,0	9,0	102	68,80
	20B071008	PL 8 SPB 710 -type 9A	710	8	4545	100	158,0	22,0	114	79,00
	20B080003	PL 3 SPB 800 -type 11A	800	3	3535	90	63,0	22,0	89	53,00
	20B080004	PL 4 SPB 800 -type 11A	800	4	4040	100	82,0	16,0	102	61,60
	20B080005	PL 5 SPB 800 -type 7A	800	5	4040	100	101,0	0,5	102	71,00
	20B080006	PL 6 SPB 800 -type 9A	800	6	4545	100	120,0	3,0	114	85,00
	20B080008	PL 8 SPB 800 -type 9A	800	8	4545	100	158,0	22,0	114	100,00
	20B090003	PL 3 SPB 900 -type 7A	900	3	3535	90	63,0	13,0	89	60,00
	20B090004	PL 4 SPB 900 -type 7A	900	4	4040	100	82,0	10,0	102	72,00
	20B090005	PL 5 SPB 900 -type 8A	900	5	4040	100	101,0	1,0	102	94,00
	20B090006	PL 6 SPB 900 -type 9A	900	6	4545	100	120,0	3,0	114	108,00
	20B090008	PL 8 SPB 900 -type 9A	900	8	4545	100	158,0	22,0	114	122,00
	20B100003	PL 3 SPB 1000 -type 11A	1000	3	4040	100	63,0	33,0	102	66,00
	20B100004	PL 4 SPB 1000 -type 11A	1000	4	4040	100	82,0	16,0	102	81,00
	20B100005	PL 5 SPB 1000 -type 7A	1000	5	4545	100	101,0	6,5	114	102,00
	20B100006	PL 6 SPB 1000 -type 9A	1000	6	4545	100	120,0	3,0	114	108,00
	20B100008	PL 8 SPB 1000 -type 9A	1000	8	5050	125	158,0	15,5	127	135,00