



MEGALINEAR


AT10 WITHOUT GAP OPEN-ENDED

FLEXION RESISTANCE

	Z_{MIN}	Z_{MIN}	Z_{MIN}
Standard steel cords	15	20	15
		IDLER MIN DIA (mm)	IDLER MIN DIA (mm)
		120	50

PULLEYS

(FOR MORE DETAILS, PLEASE SEE OUR PULLEYS CATALOGUE)

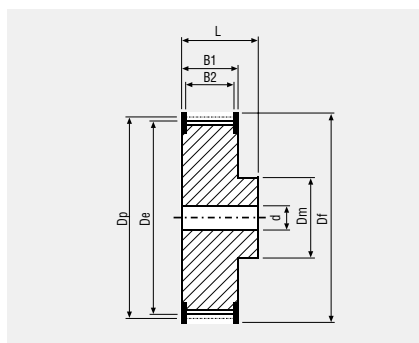

N° TEETH	DP	DE
15	47,75	45,90
16	50,93	49,08
18	57,30	55,45
19	60,48	58,63
20	63,66	61,81
22	70,03	68,18
24	76,39	74,55
25	79,58	77,73
26	82,76	80,91

N° TEETH	DP	DE
27	85,94	84,10
28	89,13	87,28
30	95,49	93,65
32	101,86	100,01
36	114,59	112,74
40	127,32	125,48
44	140,06	138,21
48	152,79	150,94
60	190,99	189,14

TYPICAL APPLICATION: CAR WASHING MACHINE



MEGALINEAR

