

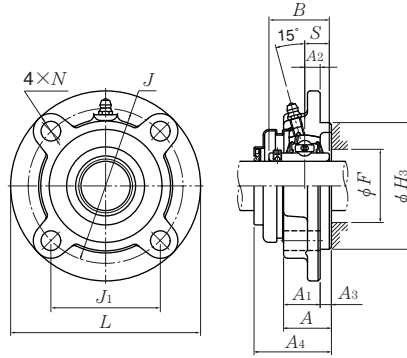


Round flanged units cast housing w/ spigot joint Set screw type

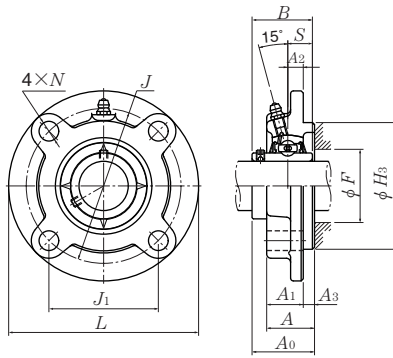

Press steel dust cover type (Open end)
S-UCFC...D1

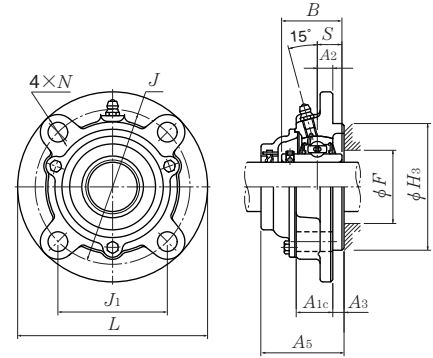

Cast dust cover type (Open end)
C-UCFC...D1

Shaft dia.	Unit number ¹⁾	Nominal dimensions														Bolt size
		mm inch							mm		inch					
		<i>L</i>	<i>J</i>	(<i>J</i> ₁)	<i>A</i> ₂	<i>N</i>	<i>A</i> ₃	<i>A</i> ₁	<i>A</i> _{1c}	<i>A</i>	<i>H</i> ₃	<i>A</i> ₀	<i>B</i>	<i>S</i>	<i>F</i> min	
12 1½	UCFC201D1 UCFC201-008D1	100 3 15⁄16	78 3 5⁄64	55.2 2 11⁄64	10 25⁄64	12 15⁄32	5 13⁄64	20.5 13⁄16	20.5 13⁄16	25.5 1	62 2.4409	33.3 1 15⁄16	31 1.2205	12.7 0.500	—	M10 3⁄8
15 9⁄16 5⁄8	UCFC202D1 UCFC202-009D1 UCFC202-010D1	100 3 15⁄16	78 3 5⁄64	55.2 2 11⁄64	10 25⁄64	12 15⁄32	5 13⁄64	20.5 13⁄16	20.5 13⁄16	25.5 1	62 2.4409	33.3 1 5⁄16	31 1.2205	12.7 0.500	—	M10 3⁄8
17 1 1⁄16	UCFC203D1 UCFC203-011D1	100 3 15⁄16	78 3 5⁄64	55.2 2 11⁄64	10 25⁄64	12 15⁄32	5 13⁄64	20.5 13⁄16	20.5 13⁄16	25.5 1	62 2.4409	33.3 1 5⁄16	31 1.2205	12.7 0.500	—	M10 3⁄8
20 ¾	UCFC204D1 UCFC204-012D1	100 3 15⁄16	78 3 5⁄64	55.2 2 11⁄64	10 25⁄64	12 15⁄32	5 13⁄64	20.5 13⁄16	20.5 13⁄16	25.5 1	62 2.4409	33.3 1 5⁄16	31 1.2205	12.7 0.500	—	M10 3⁄8
25 1 3⁄16 7⁄8 15⁄16 1	UCFC205D1 UCFC205-013D1 UCFC205-014D1 UCFC205-015D1 UCFC205-100D1	115 4 17⁄32	90 3 35⁄64	63.6 2 1⁄2	10 25⁄64	12 15⁄32	6 15⁄64	21 13⁄16	22 7⁄8	27 1 1⁄16	70 2.7559	35.8 1 13⁄32	34.1 1.3425	14.3 0.563	—	M10 3⁄8
30 1 1⁄16 1 1⁄8 1 3⁄16 1 1⁄4	UCFC206D1 UCFC206-101D1 UCFC206-102D1 UCFC206-103D1 UCFC206-104D1	125 4 29⁄32	100 3 15⁄16	70.7 2 25⁄32	10 25⁄64	12 15⁄32	8 5⁄16	23 29⁄32	24.5 31⁄32	31 1 7⁄32	80 3.1496	40.2 1 37⁄64	38.1 1.5000	15.9 0.629	—	M10 3⁄8
35 1 1⁄4 1 5⁄16 1 3⁄8 1 7⁄16	UCFC207D1 UCFC207-104D1 UCFC207-105D1 UCFC207-106D1 UCFC207-107D1	135 5 5⁄16	110 4 21⁄64	77.8 3 1⁄16	11 7⁄16	14 35⁄64	8 5⁄16	26 1 1⁄32	26 1 1⁄32	34 1 11⁄32	90 3.5433	44.4 1 3⁄4	42.9 1.6890	17.5 0.689	—	M12 7⁄16
40 1 1⁄2 1 9⁄16	UCFC208D1 UCFC208-108D1 UCFC208-109D1	145 5 23⁄32	120 4 23⁄32	84.9 3 11⁄32	11 7⁄16	14 35⁄64	10 25⁄64	26 1 1⁄32	27.5 1 5⁄64	36 1 27⁄64	100 3.9370	51.2 2 1⁄64	49.2 1.9370	19 0.748	—	M12 7⁄16
45 1 5⁄8 1 11⁄16 1 3⁄4	UCFC209D1 UCFC209-110D1 UCFC209-111D1 UCFC209-112D1	160 6 5⁄16	132 5 13⁄64	93.3 3 43⁄64	10 25⁄64	16 5⁄8	12 15⁄32	26 1 1⁄32	28 1 7⁄64	38 1 1⁄2	105 4.1339	52.2 2 3⁄64	49.2 1.9370	19 0.748	—	M14 1⁄2

Remarks: 1) These numbers indicate relubricatable type. If maintenance free type is needed, please order without suffix "D1".

Note: Please refer to page 36 for size of grease fitting.