

**GE8-PB**


Spherical plain bearing



Radial spherical plain bearing, requiring maintenance, sliding contact surface: steel/bronze, DIN ISO 12240-1, dimension series K, open design

Materiálové číslo Schaeffler:
0066525810000

Technické informace

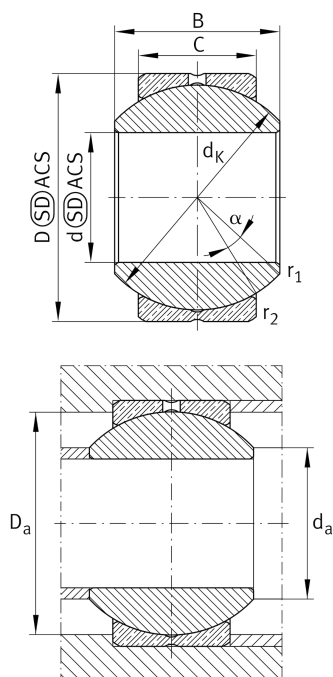

Vaše aktuální varianta produktu

Maintenance	Maintenance required	
Material	Steel	Steel
Sealing	Without	Without
Radial internal clearance	CN (Group N)	Normal internal clearance
Coating	Without	

Main Dimensions & Performance Data

d	8 mm	Bore diameter bearing
D	19 mm	Outside diameter bearing
B	12 mm	Width Inner ring
C _r	7.140 N	Basic dynamic load rating, radial
C _{0r}	17.900 N	Basic static load rating, radial
≈m	17,85 g	Hmotnost

Mounting dimensions

r _{1smin}	0,3 mm	Edge Spacing
r _{2smin}	0,3 mm	Edge Spacing
d _{a max}	10,3 mm	Connection measure Inner ring
D _{a min}	14 mm	Housing Connection Diameter



Dimensions

C	9 mm	Width Outer ring
d _K	15,875 mm	Ball diameter
α	14 °	Tilt angle
d _{OT}	0,015 mm	Bore diameter bearing, upper tolerance
d _{UT}	0 mm	Bore diameter bearing, lower tolerance
d _T	H7	Bore diameter bearing, tolerance
D _{OT}	0 mm	Outside diameter, upper tolerance
D _{UT}	-0,009 mm	Outside diameter, lower tolerance
B _{OT}	0 mm	Width inner ring, upper tolerance
B _{UT}	-0,12 mm	Width inner ring, lower tolerance
C _{OT}	0 mm	Width outer ring, upper tolerance
C _{UT}	-0,24 mm	Width outer ring, lower tolerance
G _r	0,006 - 0,035	Radial Clearance
G _{rmax}	0,035 mm	Radial clearance, maximum
G _{rmin}	0,006 mm	Radial clearance, minimum

Temperature range

T _{min}	-60 °C	Operating temperature min.
T _{max}	250 °C	Operating temperature max.



Vlastnosti



Radiální zatížení



Axiální zatížení v jednom směru



Axiální zatížení ve dvou směrech



Mazání (plastickým mazivem)



Neutěsněné



Statická úhlová chyba a vychýlení



Dynamická úhlová chyba a vychýlení