


**K60X68X23-A/0-7** [↗](#)

Needle roller cage assembly

Needle roller cage assembly K, single row

Materiálové číslo Schaeffler:  
0000385206063

Technické informace

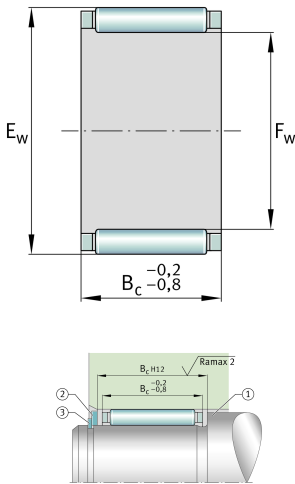

Vaše aktuální varianta produktu

|      |    |                   |
|------|----|-------------------|
| Cage | JN | Steel sheet metal |
|------|----|-------------------|

Main Dimensions & Performance Data

|          |             |                                              |
|----------|-------------|----------------------------------------------|
| $F_w$    | 60 mm       | Inner diameter of needle roller complement   |
| $E_w$    | 68 mm       | Outside diameter of needle roller complement |
| $B_c$    | 23 mm       | Width                                        |
| $C_r$    | 49.500 N    | Basic dynamic load rating, radial            |
| $C_{0r}$ | 101.000 N   | Basic static load rating, radial             |
| $C_{ur}$ | 13.800 N    | Fatigue load limit, radial                   |
| $n_G$    | 7.700 1/min | Limiting speed                               |
| $n_{gr}$ | 4.350 1/min | Reference speed                              |
| $m$      | 0,094 kg    | Hmotnost                                     |

Temperature range

|           |        |                            |
|-----------|--------|----------------------------|
| $T_{min}$ | -30 °C | Operating temperature min. |
| $T_{max}$ | 140 °C | Operating temperature max. |



### Vlastnosti

---



Radiální zatížení



Mazání (plastickým) mazivem



Mazání olejem



Neutěsněné



Malý konstrukční prostor