


Řetězová kola s tvrzeným ozubením s hotovým otvorem, drážkou a šroubem

Typ 08 B-1 1/2" x 5/16"

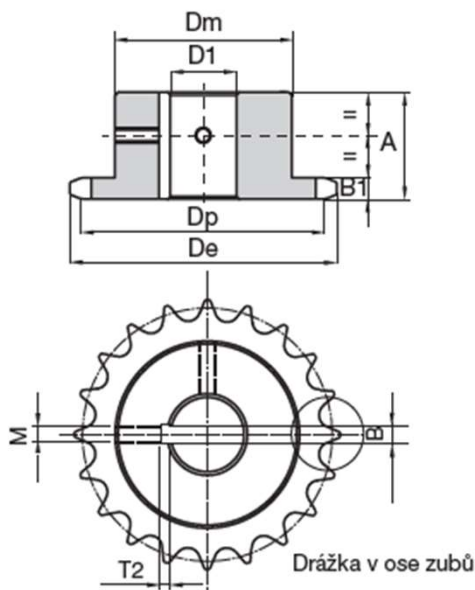

Indukčně tvrzené ozubení HRC 45 - 53

1/2" x 5/16" SIMPLEX									
Počet zubů Z	Rozměry (mm)								
	d _e	d _p	d _m	A	D ₁ H7	B ₁	B H9	T ₂	M
15	65,90	61,09	45	28	14	7,2	5	2,3	M4
	65,90	61,09	45	28	15	7,2	5	2,3	M4
	65,90	61,09	45	28	16	7,2	5	2,3	M4
	65,90	61,09	45	28	18	7,2	6	2,8	M5
	65,90	61,09	45	28	19	7,2	6	2,8	M5
	65,90	61,09	45	28	20	7,2	6	2,8	M5
	65,90	61,09	45	28	22	7,2	6	2,8	M5
	65,90	61,09	45	28	24	7,2	8	3,3	M6
	65,90	61,09	45	28	25	7,2	8	3,3	M6
	65,90	61,09	45	28	28	7,2	8	3,3	M6
16	69,50	65,10	50	28	15	7,2	5	2,3	M4
	69,50	65,10	50	28	16	7,2	5	2,3	M4
	69,50	65,10	50	28	18	7,2	6	2,8	M5
	69,50	65,10	50	28	19	7,2	6	2,8	M5
	69,50	65,10	50	28	20	7,2	6	2,8	M5
	69,50	65,10	50	28	22	7,2	6	2,8	M5
	69,50	65,10	50	28	24	7,2	8	3,3	M6
	69,50	65,10	50	28	25	7,2	8	3,3	M6
	69,50	65,10	50	28	28	7,2	8	3,3	M6
	69,50	65,10	50	28	30	7,2	8	3,3	M6
17	74,00	69,11	52	28	15	7,2	5	2,3	M4
	74,00	69,11	52	28	16	7,2	5	2,3	M4
	74,00	69,11	52	28	18	7,2	6	2,8	M5