



Pullegge a gola PL per bussola conica **POGGILOCK®**

PL V-belt pulleys for taperbushes **POGGILOCK®**

PL Keilriemenscheiben für Spannbuchse **POGGILOCK®**

Poulies trapézoïdales PL pour moyeu amovible **POGGILOCK®**

Poleas trapeciales PL para casquillo cónico **POGGILOCK®**

Diametro primitivo minimo delle pulegge raccomandato dalle norme ISO R 459 e DIN 2211:

Minimum pulley pitch diameter recommended by ISO R 459 and DIN 2211:

Empfohlener Mindest-Wirkdurchmesser der Scheiben nach ISO R 459 und DIN 2211:

Diamètre primitif minimum des poulies recommandé par ISO R 459 et DIN 2211:

Diámetro primitivo mínimo de las poleas recomendado por ISO R 459 y DIN 2211:

LINEA-X

NORMAL®

NORMALMEC®

Dp 80

A Dp 85

SPA Dp 90

• Queste pulegge possono montare solo le cinghie **NORMAL®**.

• These pulleys can operate with **NORMAL®** belts only.

• Diese Scheiben können nur mit **NORMAL®** Keilriemen benutzt werden.

• Ces poulies ne permettent que l'assemblage avec le courroies **NORMAL®**.

• Estas poleas sólo pueden montar las correas **NORMAL®**.

A - SPA

Materiale Material Werkstoff Matériel Material	Codice Item number Codierung Code Código	Descrizione Designation Bezeichnung Désignation Referencia	Dp mm	N° Gole Grooves Rillen Gorges Canales	Bussola Bush Buchse Moyeu Casquillo	Foro Bore Bohrung Alésage Agujero max mm	F mm	R mm	S mm	Peso Weight Gewicht Poids Peso kg
Ghisa Cast iron - Grauguß - Fonte - Fundición	•20A006301	PL 1 A 63 -type 8	63	1	1008	25	20,0	2,0	22	0,27
	•20A006701	PL 1 A 67 -type 8	67	1	1108	28	20,0	2,0	22	0,31
	•20A006702	PL 2 A 67 -type 5	67	2	1108	28	35,0	13,0	22	0,44
	•20A007101	PL 1 A 71 -type 8	71	1	1108	28	20,0	2,0	22	0,36
	•20A007102	PL 2 A 71 -type 5	71	2	1108	28	35,0	13,0	22	0,54
	•20A007103	PL 3 A 71 -type 5	71	3	1108	28	50,0	28,0	22	0,80
	•20A007501	PL 1 A 75 -type 8	75	1	1108	28	20,0	2,0	22	0,43
	•20A007502	PL 2 A 75 -type 5	75	2	1108	28	35,0	13,0	22	0,60
	•20A007503	PL 3 A 75 -type 5	75	3	1108	28	50,0	28,0	22	1,00
	•20A008001	PL 1 A 80 -type 8	80	1	1210	32	20,0	5,0	25	0,48
	•20A008002	PL 2 A 80 -type 5	80	2	1210	32	35,0	10,0	25	0,64
	•20A008003	PL 3 A 80 -type 5	80	3	1210	32	50,0	25,0	25	1,00
	•20A008501	PL 1 A 85 -type 8	85	1	1210	32	20,0	5,0	25	0,60
	•20A008502	PL 2 A 85 -type 5	85	2	1210	32	35,0	10,0	25	0,75
	•20A008503	PL 3 A 85 -type 5	85	3	1210	32	50,0	25,0	25	1,20
	20A009001	PL 1 SPA 90 -type 8	90	1	1210	32	20,0	5,0	25	0,70
	20A009002	PL 2 SPA 90 -type 5	90	2	1610	42	35,0	10,0	25	0,80
	20A009003	PL 3 SPA 90 -type 5	90	3	1610	42	50,0	25,0	25	1,05
	20A009004	PL 4 SPA 90 -type 4	90	4	1615	42	65,0	13,5	38	1,40
	20A009501	PL 1 SPA 95 -type 8	95	1	1210	32	20,0	5,0	25	0,80
	20A009502	PL 2 SPA 95 -type 5	95	2	1610	42	35,0	10,0	25	0,87
	20A009503	PL 3 SPA 95 -type 5	95	3	1610	42	50,0	25,0	25	1,20
	20A009504	PL 4 SPA 95 -type 5	95	4	1615	42	65,0	27,0	38	1,54
	20A010001	PL 1 SPA 100 -type 8	100	1	1610	42	20,0	5,0	25	0,90
	20A010002	PL 2 SPA 100 -type 5	100	2	1610	42	35,0	10,0	25	1,10
	20A010003	PL 3 SPA 100 -type 2	100	3	1610	42	50,0	25,0	25	1,30
	20A010004	PL 4 SPA 100 -type 2	100	4	1615	42	65,0	27,0	38	1,67
	20A010005	PL 5 SPA 100 -type 2	100	5	1615	42	80,0	42,0	38	2,18
	20A010601	PL 1 SPA 106 -type 8	106	1	1610	42	20,0	5,0	25	1,00
	20A010602	PL 2 SPA 106 -type 5	106	2	1610	42	35,0	10,0	25	1,18
	20A010603	PL 3 SPA 106 -type 2	106	3	1610	42	50,0	25,0	25	1,60
	20A010604	PL 4 SPA 106 -type 5	106	4	2012	50	65,0	33,0	32	1,80
	20A010605	PL 5 SPA 106 -type 5	106	5	2012	50	80,0	48,0	32	2,40
	20A011201	PL 1 SPA 112 -type 8	112	1	1610	42	20,0	5,0	25	1,10
	20A011202	PL 2 SPA 112 -type 5	112	2	1610	42	35,0	10,0	25	1,38
	20A011203	PL 3 SPA 112 -type 5	112	3	2012	50	50,0	18,0	32	1,65
	20A011204	PL 4 SPA 112 -type 5	112	4	2012	50	65,0	33,0	32	2,00
	20A011205	PL 5 SPA 112 -type 5	112	5	2012	50	80,0	48,0	32	2,50




Pulegge a gola PL per bussola conica **POGGILOCK®**

PL V-belt pulleys for taperbushes **POGGILOCK®**

PL Keilriemenscheiben für Spannbuchse **POGGILOCK®**

Poulies trapézoïdales PL pour moyeu amovible **POGGILOCK®**

Poleas trapeciales PL para casquillo cónico **POGGILOCK®**

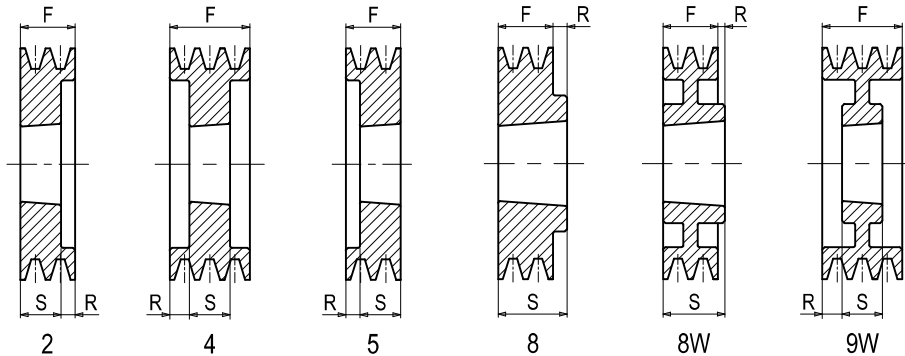

A - SPA

Materiale Material Werkstoff Matériel Material	Codice Item number Codierung Code Código	Descrizione Designation Bezeichnung Désignation Referencia	Dp mm	N° Gole Grooves Rillen Gorges Canales	Bussola Bush Buchse Moyeu Casquillo	Foro Bore Bohrung Alésage Agujero max mm	F mm	R mm	S mm	Peso Weight Gewicht Poids Peso kg
Ghisa Cast iron - Grauguß - Fonte - Fundición	20A011801	PL 1 SPA 118 -type 8	118	1	1610	42	20,0	5,0	25	1,25
	20A011802	PL 2 SPA 118 -type 5	118	2	1610	42	35,0	10,0	25	1,60
	20A011803	PL 3 SPA 118 -type 2	118	3	2012	50	50,0	18,0	32	1,90
	20A011804	PL 4 SPA 118 -type 2	118	4	2012	50	65,0	33,0	32	2,30
	20A011805	PL 5 SPA 118 -type 2	118	5	2012	50	80,0	48,0	32	2,60
	20A012501	PL 1 SPA 125 -type 8	125	1	1610	42	20,0	5,0	25	1,50
	20A012502	PL 2 SPA 125 -type 5	125	2	1610	42	35,0	10,0	25	1,83
	20A012503	PL 3 SPA 125 -type 2	125	3	2012	50	50,0	18,0	32	2,40
	20A012504	PL 4 SPA 125 -type 2	125	4	2012	50	65,0	33,0	32	2,80
	20A012505	PL 5 SPA 125 -type 4	125	5	2012	50	80,0	24,0	32	3,05
	20A013201	PL 1 SPA 132 -type 8	132	1	1610	42	20,0	5,0	25	1,60
	20A013202	PL 2 SPA 132 -type 5	132	2	2012	50	35,0	3,0	32	2,10
	20A013203	PL 3 SPA 132 -type 2	132	3	2012	50	50,0	18,0	32	2,50
	20A013204	PL 4 SPA 132 -type 2	132	4	2517	65	65,0	20,0	45	2,80
	20A013205	PL 5 SPA 132 -type 4	132	5	2517	65	80,0	17,5	45	3,30
	20A014001	PL 1 SPA 140 -type 8	140	1	1610	42	20,0	5,0	25	1,80
	20A014002	PL 2 SPA 140 -type 5	140	2	2012	50	35,0	3,0	32	2,40
	20A014003	PL 3 SPA 140 -type 5	140	3	2517	65	50,0	5,0	45	2,85
	20A014004	PL 4 SPA 140 -type 2	140	4	2517	65	65,0	20,0	45	3,40
	20A014005	PL 5 SPA 140 -type 4	140	5	2517	65	80,0	17,5	45	4,10
	20A015001	PL 1 SPA 150 -type 8	150	1	1610	42	20,0	5,0	25	2,10
	20A015002	PL 2 SPA 150 -type 5	150	2	2012	50	35,0	3,0	32	2,92
	20A015003	PL 3 SPA 150 -type 5	150	3	2517	65	50,0	5,0	45	3,60
	20A015004	PL 4 SPA 150 -type 2	150	4	2517	65	65,0	20,0	45	4,20
	20A015005	PL 5 SPA 150 -type 4	150	5	2517	65	80,0	17,5	45	4,80
	20A016001	PL 1 SPA 160 -type 8	160	1	1610	42	20,0	5,0	25	2,45
	20A016002	PL 2 SPA 160 -type 5	160	2	2012	50	35,0	3,0	32	3,50
	20A016003	PL 3 SPA 160 -type 5	160	3	2517	65	50,0	5,0	45	4,30
	20A016004	PL 4 SPA 160 -type 2	160	4	2517	65	65,0	20,0	45	4,80
	20A016005	PL 5 SPA 160 -type 4	160	5	2517	65	80,0	17,5	45	5,40
	20A017001	PL 1 SPA 170 -type 8	170	1	1610	42	20,0	5,0	25	1,93
	20A017002	PL 2 SPA 170 -type 5	170	2	2012	50	35,0	3,0	32	4,07
	20A017003	PL 3 SPA 170 -type 5	170	3	2517	65	50,0	5,0	45	5,20
	20A017004	PL 4 SPA 170 -type 2	170	4	2517	65	65,0	20,0	45	5,70
	20A017005	PL 5 SPA 170 -type 4	170	5	2517	65	80,0	17,5	45	6,20
	20A018001	PL 1 SPA 180 -type 8W	180	1	1610	42	20,0	5,0	25	2,00
	20A018002	PL 2 SPA 180 -type 9W	180	2	2012	50	35,0	1,5	32	3,20
	20A018003	PL 3 SPA 180 -type 5	180	3	2517	65	50,0	5,0	45	6,00
	20A018004	PL 4 SPA 180 -type 2	180	4	2517	65	65,0	20,0	45	6,60
	20A018005	PL 5 SPA 180 -type 4	180	5	3020	75	80,0	14,5	51	6,60




Pulegge a gola PL per bussola conica **POGGILOCK®**

PL V-belt pulleys for taperbushes **POGGILOCK®**

PL Keilriemenscheiben für Spannbuchse **POGGILOCK®**

Poulies trapézoïdales PL pour moyeu amovible **POGGILOCK®**

Poleas trapeciales PL para casquillo cónico **POGGILOCK®**

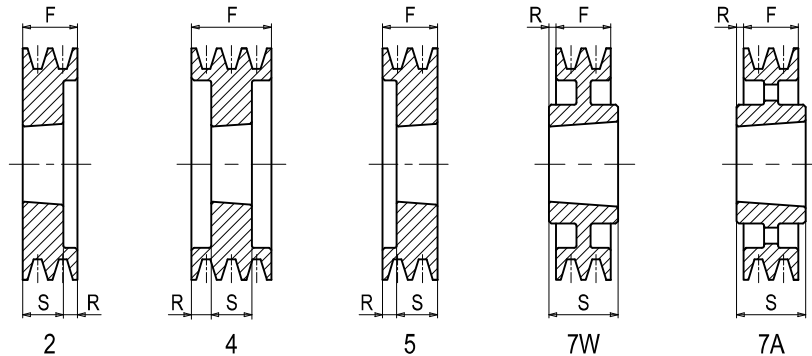

A - SPA

Materiale Material Werkstoff Matériel Material	Codice Item number Codierung Code Código	Descrizione Designation Bezeichnung Désignation Referencia	Dp mm	N° Gole Grooves Rillen Gorges Canales	Bussola Bush Buchse Moyeu Casquillo	Foro Bore Bohrung Alésage Agujero max mm	F mm	R mm	S mm	Peso Weight Gewicht Poids Peso kg
Ghisa Cast iron - Grauguß - Fonte - Fundición	20A019001	PL 1 SPA 190 -type 8W	190	1	1610	42	20,0	5,0	25	2,40
	20A019002	PL 2 SPA 190 -type 9W	190	2	2012	50	35,0	1,5	32	3,60
	20A019003	PL 3 SPA 190 -type 5	190	3	2517	65	50,0	5,0	45	7,10
	20A019004	PL 4 SPA 190 -type 2	190	4	2517	65	65,0	20,0	45	7,80
	20A019005	PL 5 SPA 190 -type 4	190	5	3020	75	80,0	14,5	51	7,80
	20A020001	PL 1 SPA 200 -type 8W	200	1	2012	50	20,0	12,0	32	3,00
	20A020002	PL 2 SPA 200 -type 7W	200	2	2517	65	35,0	5,0	45	4,90
	20A020003	PL 3 SPA 200 -type 9W	200	3	2517	65	50,0	2,5	45	6,00
	20A020004	PL 4 SPA 200 -type 2	200	4	3020	75	65,0	14,0	51	8,20
	20A020005	PL 5 SPA 200 -type 4	200	5	3020	75	80,0	14,5	51	8,20
	20A021201	PL 1 SPA 212 -type 8W	212	1	2012	50	20,0	12,0	32	3,40
	20A021202	PL 2 SPA 212 -type 7W	212	2	2517	65	35,0	5,0	45	5,00
	20A021203	PL 3 SPA 212 -type 9W	212	3	2517	65	50,0	2,5	45	6,50
	20A021204	PL 4 SPA 212 -type 2	212	4	3020	75	65,0	14,0	51	9,60
	20A021205	PL 5 SPA 212 -type 2	212	5	3020	75	80,0	29,0	51	10,40
	20A022401	PL 1 SPA 224 -type 8W	224	1	2012	50	20,0	12,0	32	3,60
	20A022402	PL 2 SPA 224 -type 7W	224	2	2517	65	35,0	5,0	45	5,40
	20A022403	PL 3 SPA 224 -type 9W	224	3	2517	65	50,0	2,5	45	6,60
	20A022404	PL 4 SPA 224 -type 10W	224	4	3020	75	65,0	14,0	51	8,00
	20A022405	PL 5 SPA 224 -type 2	224	5	3020	75	80,0	29,0	51	10,90
	20A023601	PL 1 SPA 236 -type 8W	236	1	2012	50	20,0	12,0	32	3,50
	20A023602	PL 2 SPA 236 -type 8W	236	2	2517	65	35,0	10,0	45	5,90
	20A023603	PL 3 SPA 236 -type 9W	236	3	2517	65	50,0	2,5	45	7,00
	20A023604	PL 4 SPA 236 -type 10W	236	4	3020	75	65,0	14,0	51	11,10
	20A023605	PL 5 SPA 236 -type 2	236	5	3020	75	80,0	29,0	51	11,80
	20A025001	PL 1 SPA 250 -type 8W	250	1	2012	50	20,0	12,0	32	3,90
	20A025002	PL 2 SPA 250 -type 7W	250	2	2517	65	35,0	5,0	45	5,80
	20A025003	PL 3 SPA 250 -type 9W	250	3	2517	65	50,0	2,5	45	7,30
	20A025004	PL 4 SPA 250 -type 9W	250	4	3020	75	65,0	7,0	51	9,30
	20A025005	PL 5 SPA 250 -type 9W	250	5	3020	75	80,0	14,5	51	11,00
	20A028001	PL 1 SPA 280 -type 8W	280	1	2012	50	20,0	12,0	32	4,40
	20A028002	PL 2 SPA 280 -type 8W	280	2	2517	65	35,0	10,0	45	6,00
	20A028003	PL 3 SPA 280 -type 9W	280	3	2517	65	50,0	2,5	45	8,60
	20A028004	PL 4 SPA 280 -type 9W	280	4	3020	75	65,0	7,0	51	10,00
	20A028005	PL 5 SPA 280 -type 7W	280	5	3535	90	80,0	4,5	89	14,40
	20A030001	PL 1 SPA 300 -type 8A	300	1	2012	50	20,0	12,0	32	4,60
	20A030002	PL 2 SPA 300 -type 8A	300	2	2517	65	35,0	10,0	45	6,50
	20A030003	PL 3 SPA 300 -type 8A	300	3	3020	75	50,0	1,0	51	9,50
	20A030004	PL 4 SPA 300 -type 9A	300	4	3020	75	65,0	7,0	51	12,00
	20A030005	PL 5 SPA 300 -type 8A	300	5	3535	90	80,0	9,0	89	17,00