
**TKVD15-B**

Profile rail

Guideways for linear recirculating ball bearing unit and four-row linear recirculating ball guidance system

Technical information

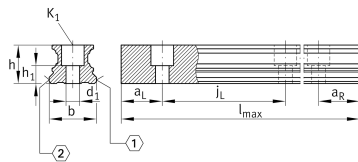

Your current product variant

Size code	15
Length	~4000
Version	B

Main Dimensions & Performance Data

h	15 mm	Height
b	15 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	1,44 kg/m	Weight

Mounting dimensions

K 1	M4	Thread
K1 M A	5 Nm	Tightening torque
d 1	4,6 mm	Bore diameter



Dimensions

l_{max}	3.900 mm	Max length single piece guideway
$a_{L\ max}$	53 mm	Distance
$a_{L\ min}$	20 mm	Distance
$a_{R\ max}$	53 mm	Distance
$a_{R\ min}$	20 mm	Distance
j_L	60 mm	Increment
h_1	7,7 mm	Length
Tol h_1	0,5 mm	Upper tolerance
Tol h_1	-0,5 mm	Distance Distance

Additional information

KWVE15-B...	Usable carriage(s)
KUVE15-B...	Usable linear systems