
**TKVD30**

Profile rail

Guideways for linear recirculating ball bearing unit and four-row linear recirculating ball guidance system

Technické informace

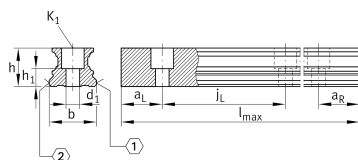

Vaše aktuální varianta produktu

Size code	30
Length	~6000

Main Dimensions & Performance Data

h	23,5 mm	Height
b	28 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
m	4,3 kg/m	Hmotnost

Mounting dimensions

K 1	M8	Thread
K1 M A	41 Nm	Tightening torque
d 1	9 mm	Bore diameter



Dimensions

l_{max}	6.000 mm	Max length single piece guideway
$a_{L\ max}$	71 mm	Distance
$a_{L\ min}$	20 mm	Distance
$a_{R\ max}$	71 mm	Distance
$a_{R\ min}$	20 mm	Distance
j_L	80 mm	Increment
h_1	11 mm	length
Tol h_1	0,5 mm	Upper tolerance
Tol h_1	-0,5 mm	Distance Distance

Additional information

KWVE30-B..	usable carriage(s)
KUVE30-B..	usable linear systems