
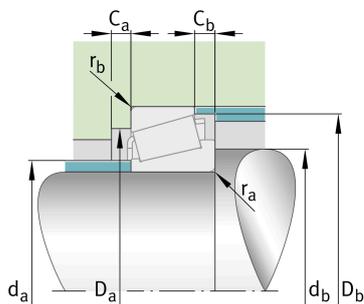


**FAG****32916-H**

Tapered roller bearing

Tapered roller bearings 329, main dimensions
acc. to DIN 720, separable

Technické informace

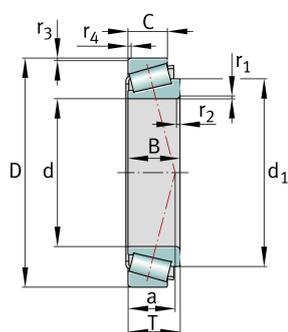

Vaše aktuální varianta produktu

Tolerance class	P6X	Class 6X (ISO 492:2014)
Heat treatment	Standard	
Cage	Standard	Sheet steel cage, window cage, roller-guided
Internal design	Standard	
Quality level	H	
Number of rolling element rows	1	Single-row design

Main Dimensions & Performance Data

d	80 mm	Bore diameter
D	110 mm	Outside diameter
B	20 mm	Width, inner ring
C	16 mm	Width, outer ring
T	20 mm	Width, total
C_r	73.200 N	Basic dynamic load rating, radial
C_{0r}	132.000 N	Basic static load rating, radial
C_{ur}	16.400 N	Fatigue load limit, radial
n_G	5.040 1/min	Limiting speed
n_{gr}	3.350 1/min	Thermal speed rating
m	0,502 kg	Hmotnost



Mounting dimensions

$d_{a \max}$	86 mm	Maximum diameter of shaft shoulder
$d_{b \min}$	86 mm	Minimum diameter of shaft shoulder
$D_{a \min}$	102 mm	Minimum diameter of housing shoulder
$D_{a \max}$	104 mm	Maximum diameter of housing shoulder
$D_{b \min}$	106 mm	Minimum diameter of housing shoulder
$C_{a \min}$	4 mm	Minimum axial space
$C_{b \min}$	4 mm	Minimum axial space
$r_{a \max}$	1 mm	Maximum fillet radius of shaft
$r_{b \max}$	1 mm	Maximum fillet radius of housing

Dimensions

$r_{1, 2 \min}$	1 mm	Minimum chamfer dimension of inner ring back face
$r_{3, 4 \min}$	1 mm	Minimum chamfer dimension of outer ring back face
a	20 mm	Distance between the apexes of the pressure cones
$d_{1 \max}$	98,5 mm	Maximum guidance rib diameter of inner ring

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.

Calculation factors

e	0,35	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y	1,71	Dynamic axial load factor
Y_0	0,94	Static axial load factor

Additional information

T2BC080

Comparative designation to ISO 10317 and ISO 355



Vlastnosti



Radiální zatížení



Axiální zatížení v jednom směru



Mazání (plastickým) mazivem



Mazání olejem



Neutěsněné