

SSEM40WW



Super Smart ball bearings, metric

SSE, Ball Bushing Bearing, 40 mm, Self-Aligning, Adjustable, Closed for end supported applications, Not Corrosion Resistant



Lead Time: Next Day\*

\$177.00 each<sup>+</sup>

\*Lead times may increase with higher quantities. Lead time displayed in business days.

<sup>+</sup>The price shown here is the North American List Price for general reference only. Please Contact Thomson for actual net price and current delivery schedule which will vary with geographic region, quantity ordered and distribution channel. Estimated costs for shipping, packaging and import taxes/duty are not included in this list price. Please contact Thomson Customer Support for more information.

Dimensions

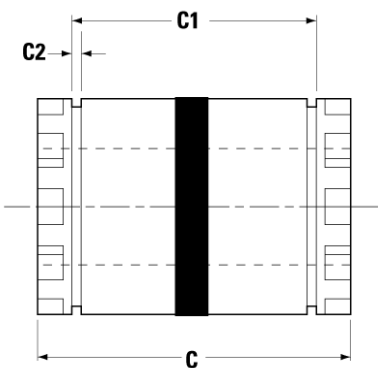

Dimension	Value
C	80.00 mm (3.150 in)
C1	60.76 mm (2.392 in)
C2	2.15 mm (0.085 in)
d	40.00 mm (1.575 in)
D	62.00 mm (2.441 in)

Specifications


Specifications	Value
Adjustable/Not Adjustable	Adjustable
Closed/Open	Closed
Roll Pack	No Roll Pack

Specifications	Value
Food Grade Rated	Not Food Grade
Self Alignment	Self-aligning
Single/Twin	Single
Temperature Max	85 °C / 185 °F
Use with shafting class	MM
Wipers, Seals	WW
Weight	0.392 kg / 0.864 lbs
Nominal Diameter	40 mm / 1.575 in
Outer Diameter	62 mm / 2.441 in
Length	80 mm / 3.150 in

## Performance

Performance	Value
Load Capacity, Dynamic	13700 N / 3,079.883 lbf

## Order Code

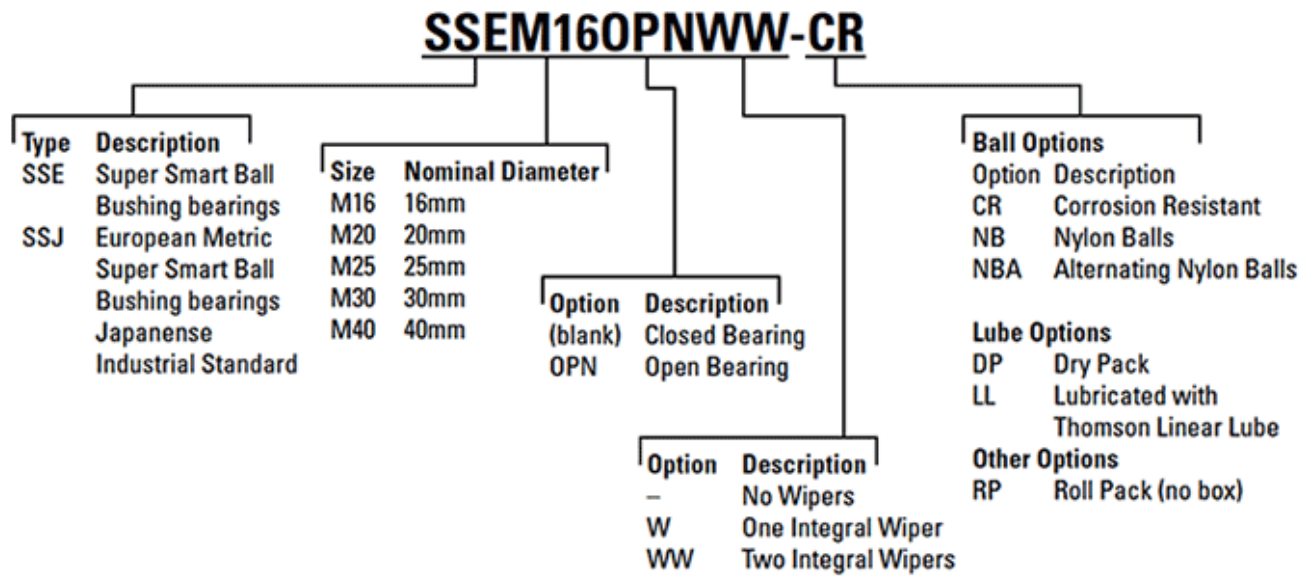

## Related Products



## 40 MM CTL

40" Shafting, MM Class, Cut to Length

<https://www.thomsonlinear.com/en/produit>

1/40 MM CTL